

PLATE STEEL PAINTING

Provide one coat of primer applied at the shop. Use Sherwin Williams Macropoxy 5,000.


Provide two coats of Sherwin Williams Macropoxy 646 in the field on all exposed surfaces.

General Notes

This design is based upon a vehicle loading of 100,000 lbs, taken as four load points equally distributed, or a point load of 25,000 lbs.

All steel is A36 or better

Welding rod is 70 ksi

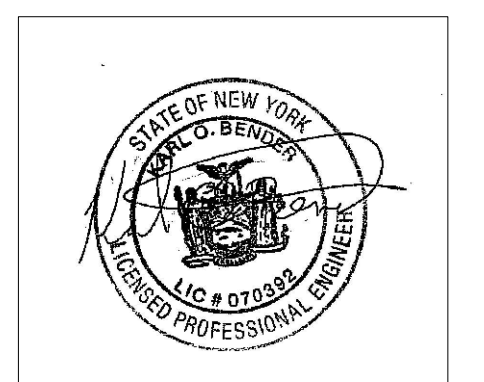

No.	Revision/Issue	Date


Firm Name and Address

AOK Engineering,
 PLLC
 1580 US 11
 Gouverneur, NY
 13642

Project Name and Address

REPAIR BUILDING 644
 FIRE DEPARTMENT
 PROJECT #HAAW232002
 Floor Trench Drain
 Details

Project	Sheet
Date 21 JAN 25	1 of 2
Scale As shown	

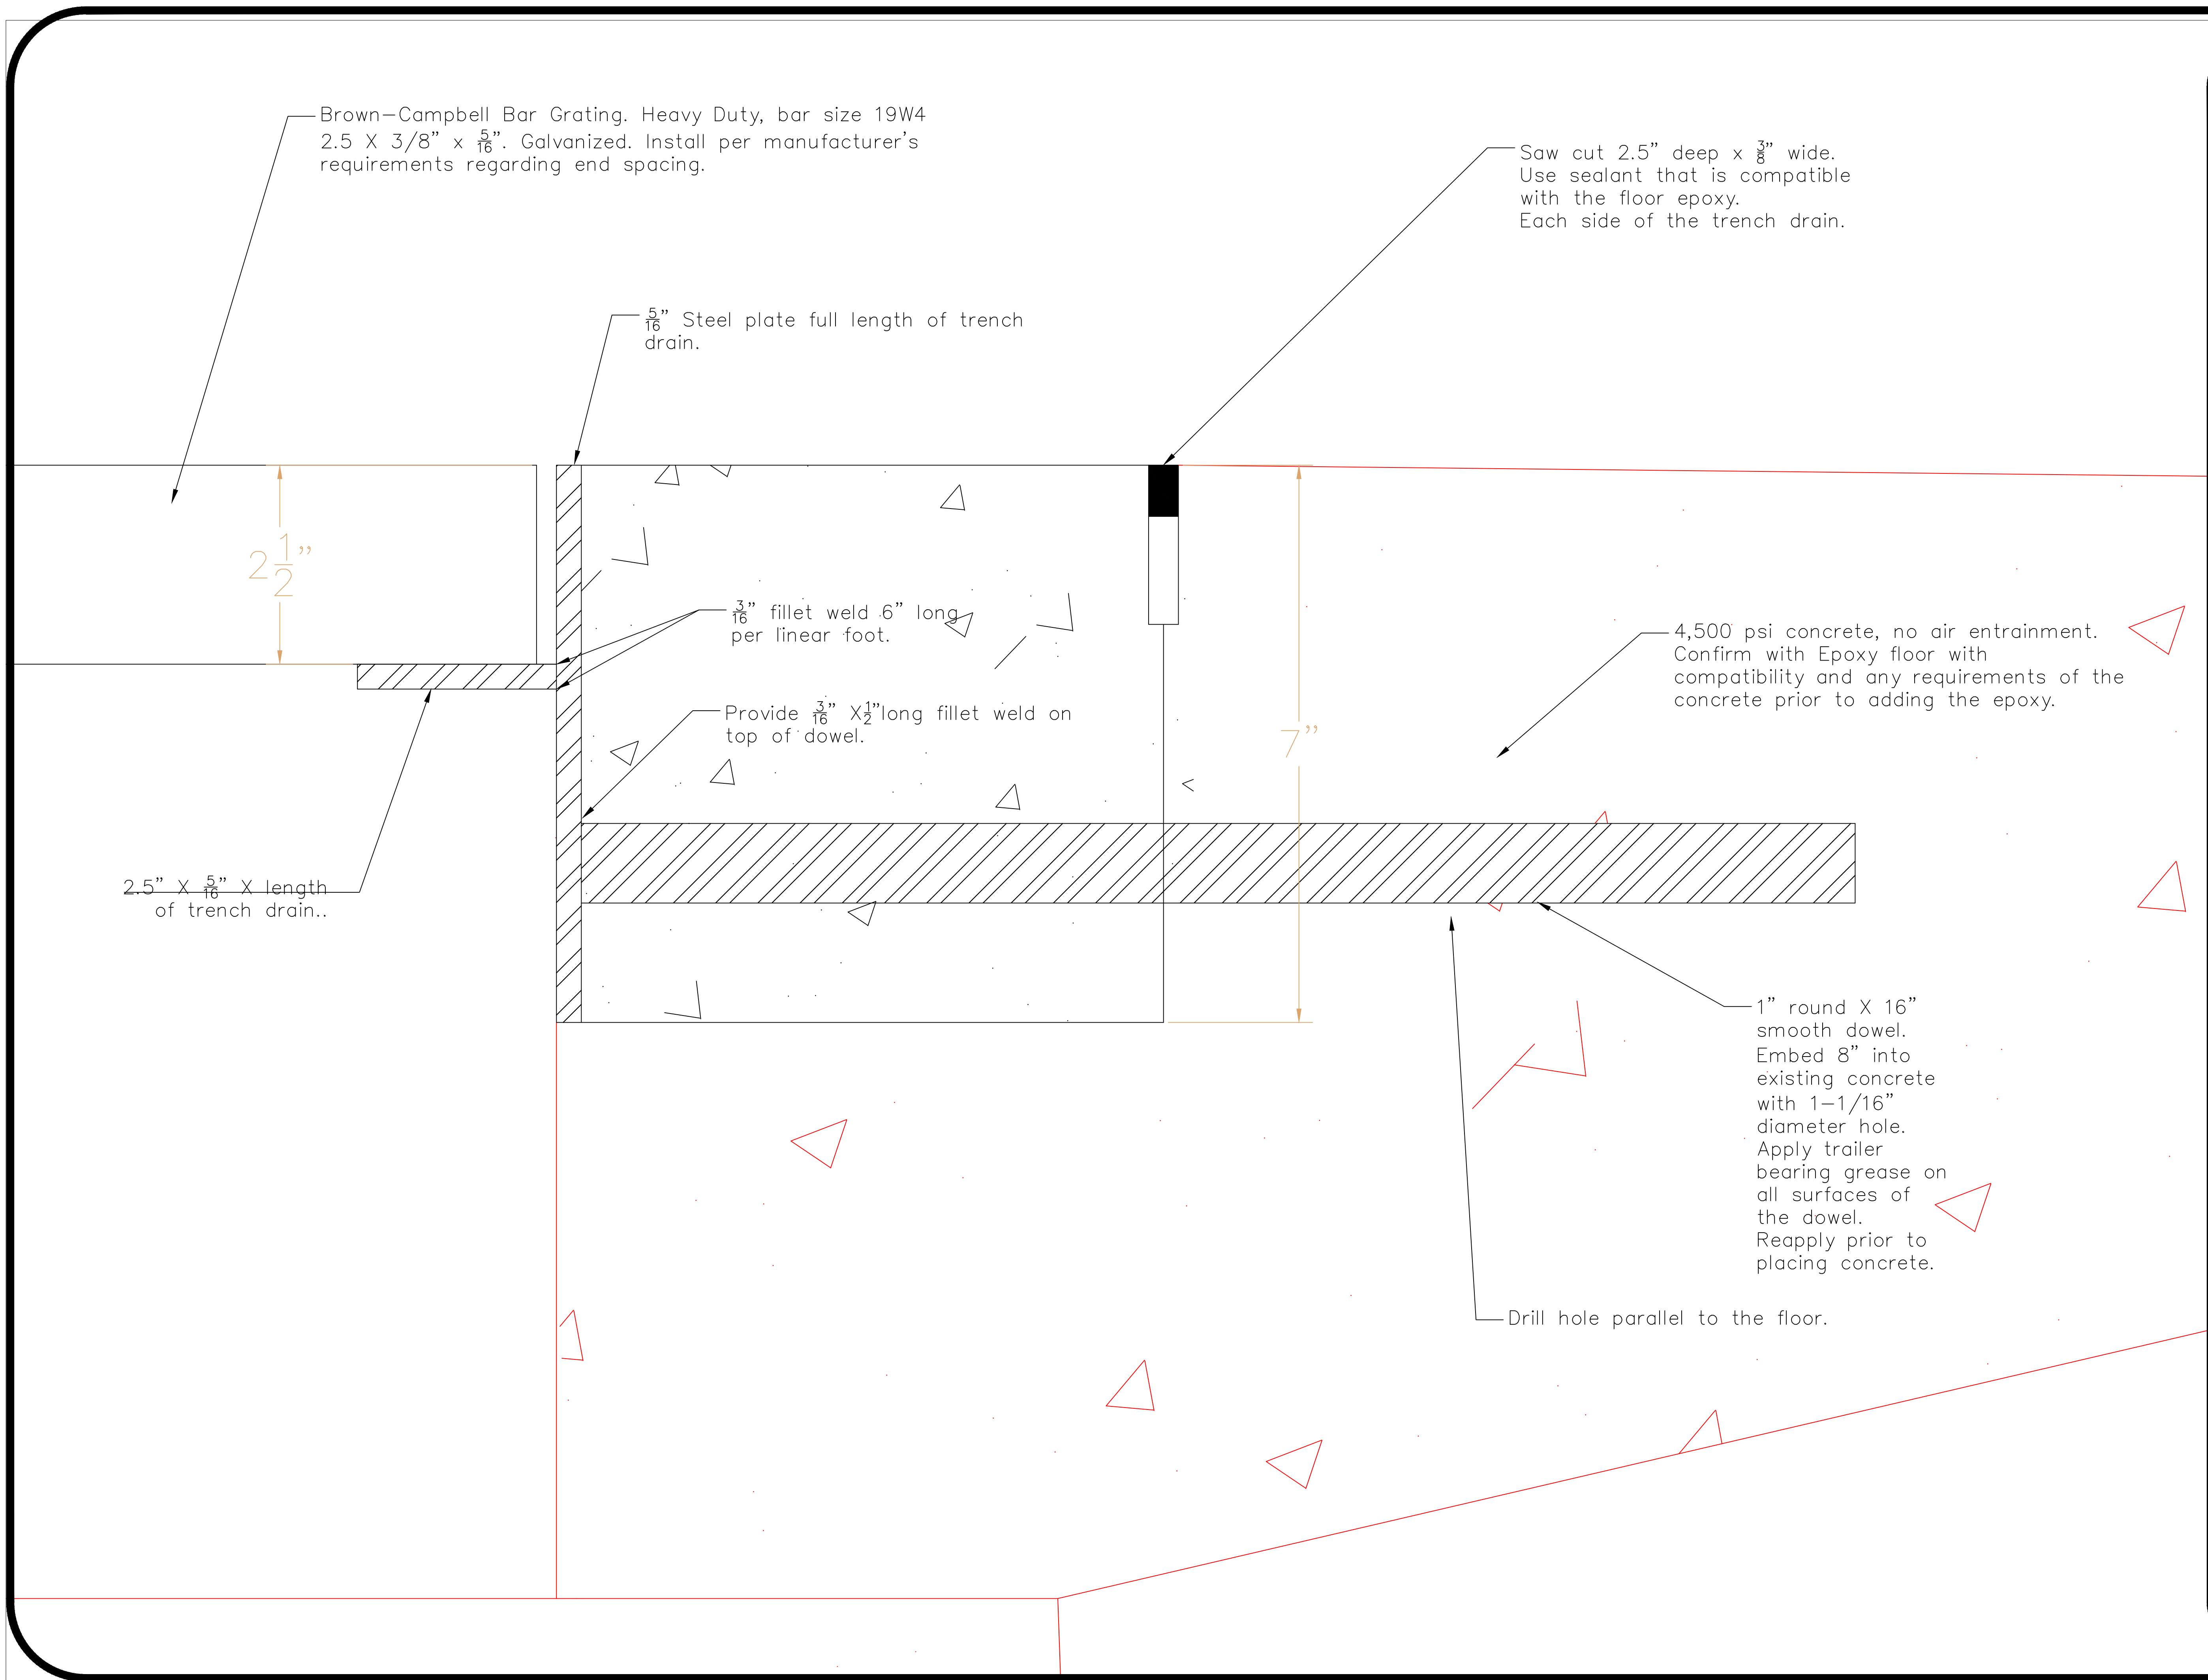

General Notes



No.	Revision/Issue	Date

Firm Name and Address
AOK Engineering,
PLLC
1580 US 11
Gouverneur, NY
13642

Project Name and Address
REPAIR BUILDING 644
FIRE DEPARTMENT
PROJECT #HAAW232002
Floor Trench Drain
Details

Project	Sheet
Date 21 JAN 25	2 of 2
Scale As shown	