


#11
QTY = 24

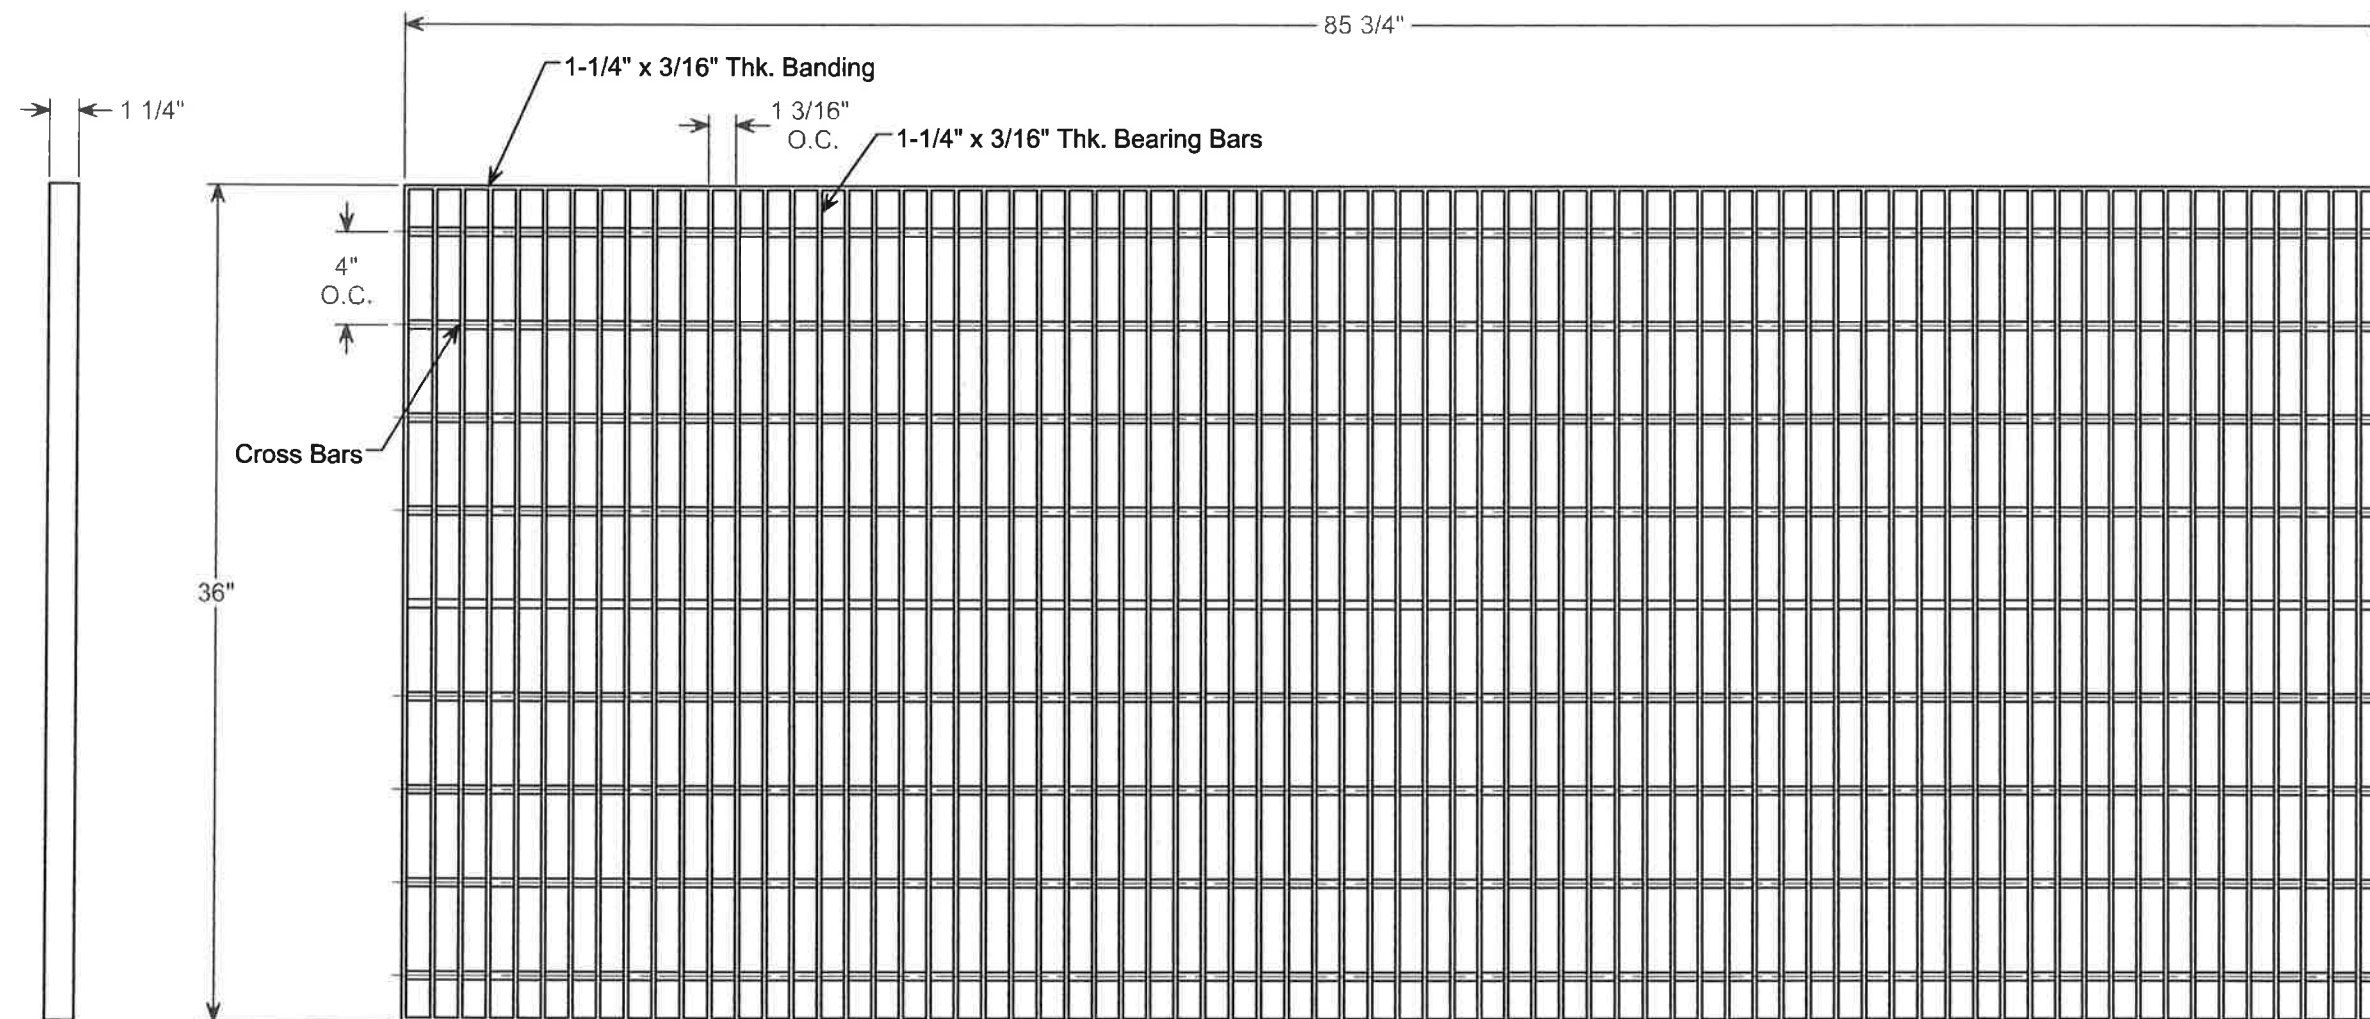


Fabricate according to NAAMM W-19-4

Tolerances, unless noted	
Dimension, (in.)	Tolerance, (in.)
0.00 to 6.00	+/- 1/32"
6.01 to 12.00	+/- 1/16"
12.01 to 24.00	+/- 3/32"
24.01 to 48.00	+/- 1/8"
48.01 to 96.00	+/- 5/32"
96.01 to 144.00	+/- 3/16"
144.01 and up	+/- 1/4"

A	12/14/2017	Initial Drawing	L.G.	-
REV.	DATE	DESCRIPTION	INITIALS	ECN

#13
Qty = 3

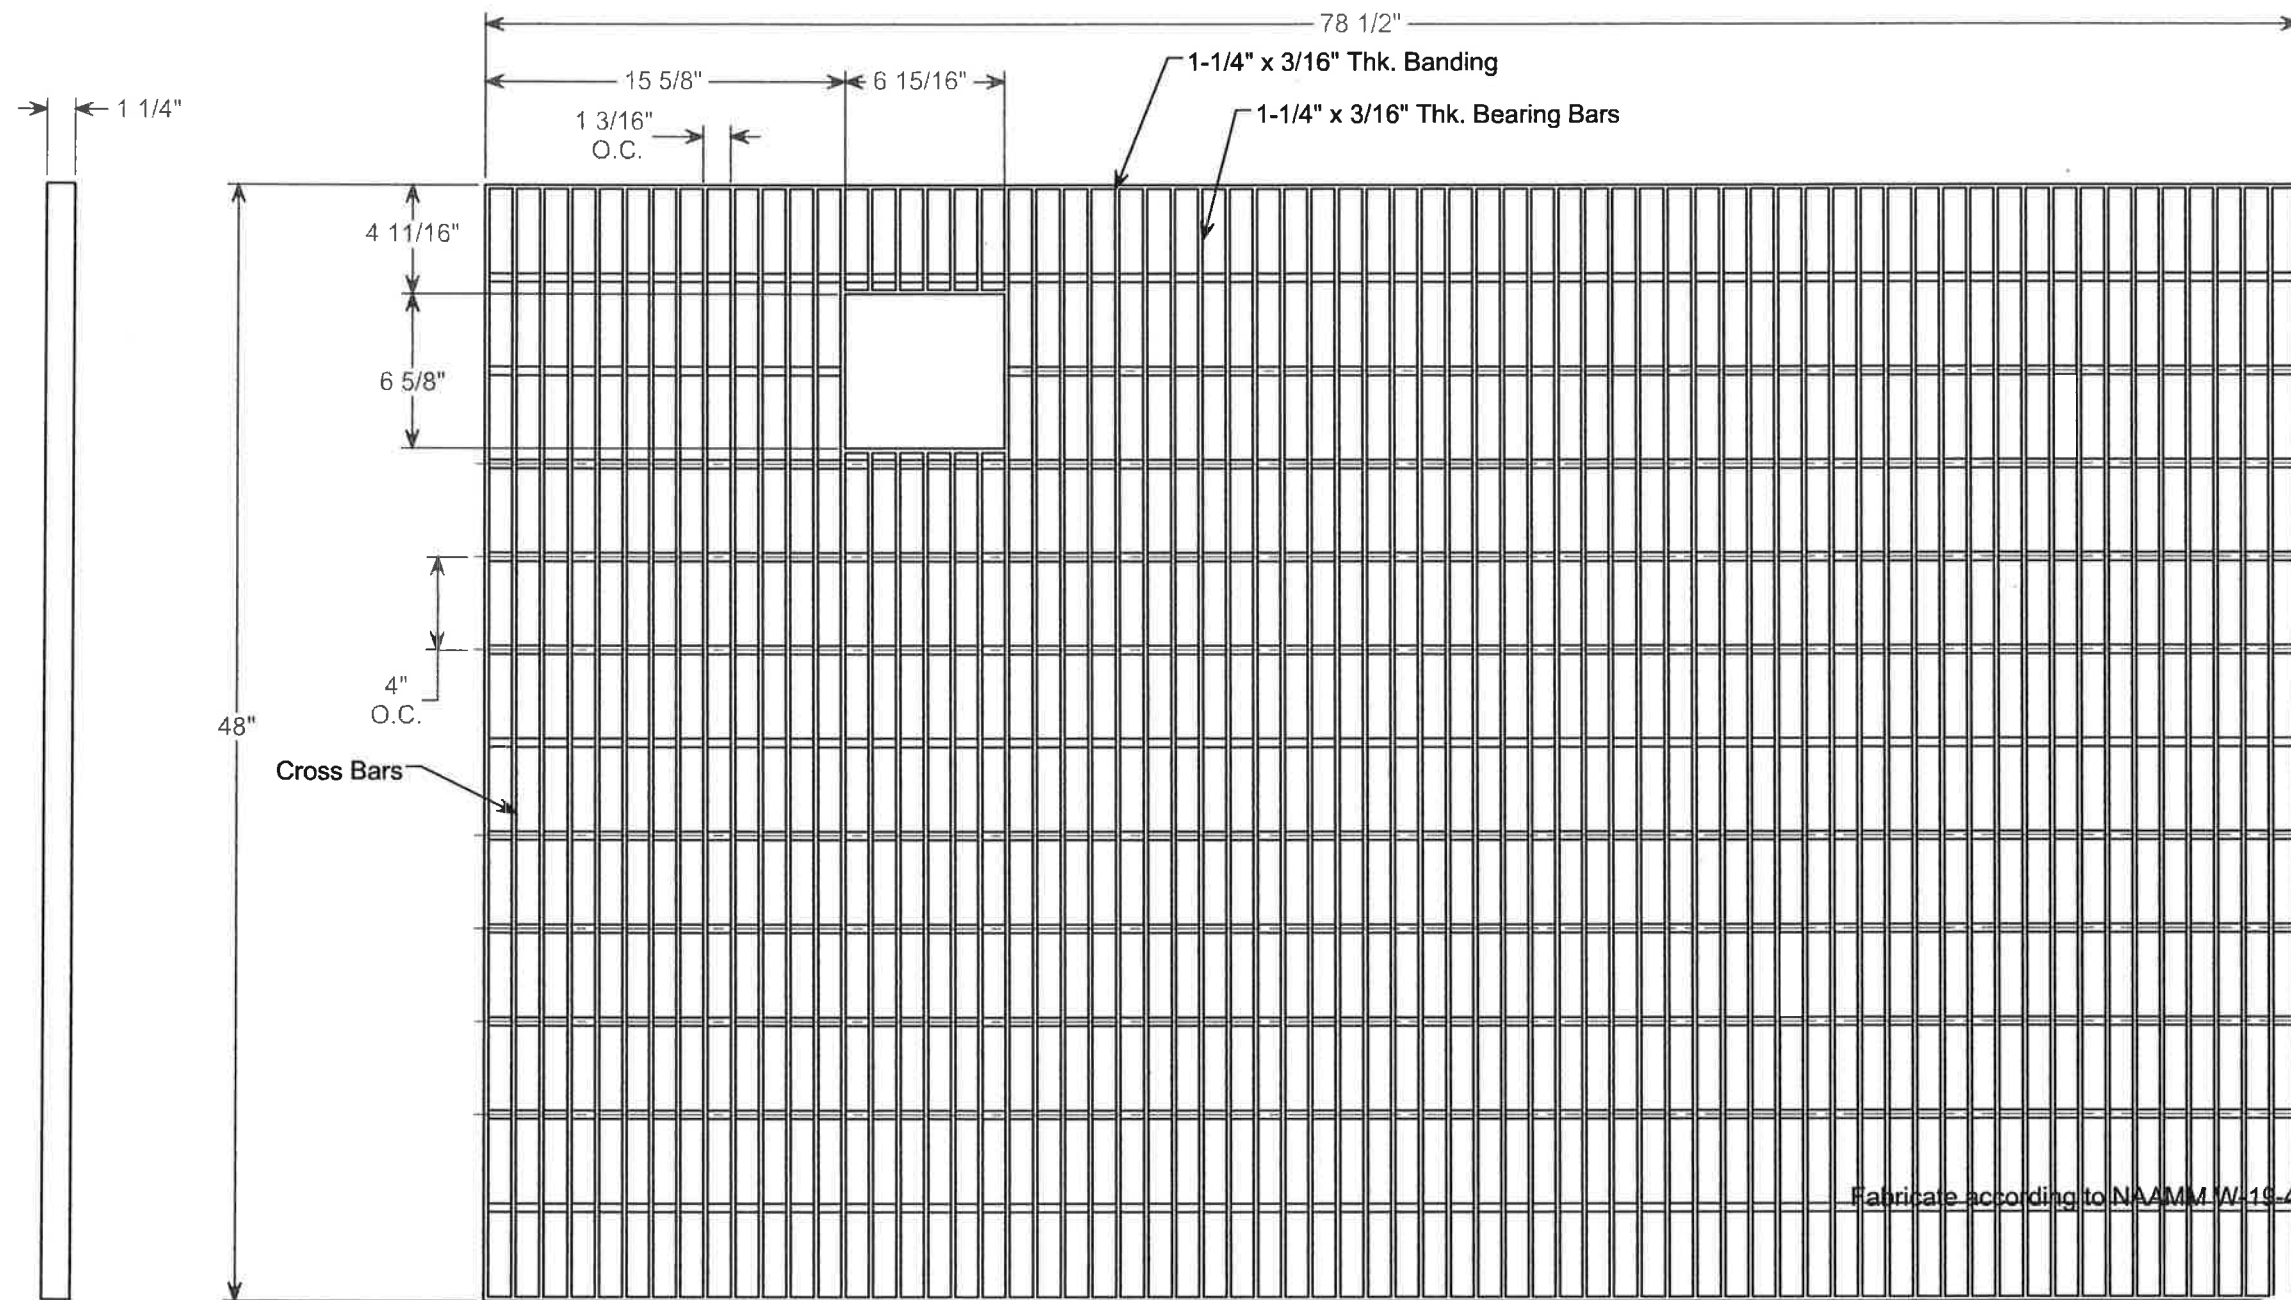


W-19-4

Tolerances, unless noted	
Dimension, (in.)	Tolerance, (in.)
0.00 to 6.00	+/- 1/32"
6.01 to 12.00	+/- 1/16"
12.01 to 24.00	+/- 3/32"
24.01 to 48.00	+/- 1/8"
48.01 to 96.00	+/- 5/32"
96.01 to 144.00	+/- 3/16"
144.01 and up	+/- 1/4"

A	12/14/2017	Initial Drawing	L.G.	-
REV.	DATE	DESCRIPTION	INITIALS	ECN

#12
Qty = 3

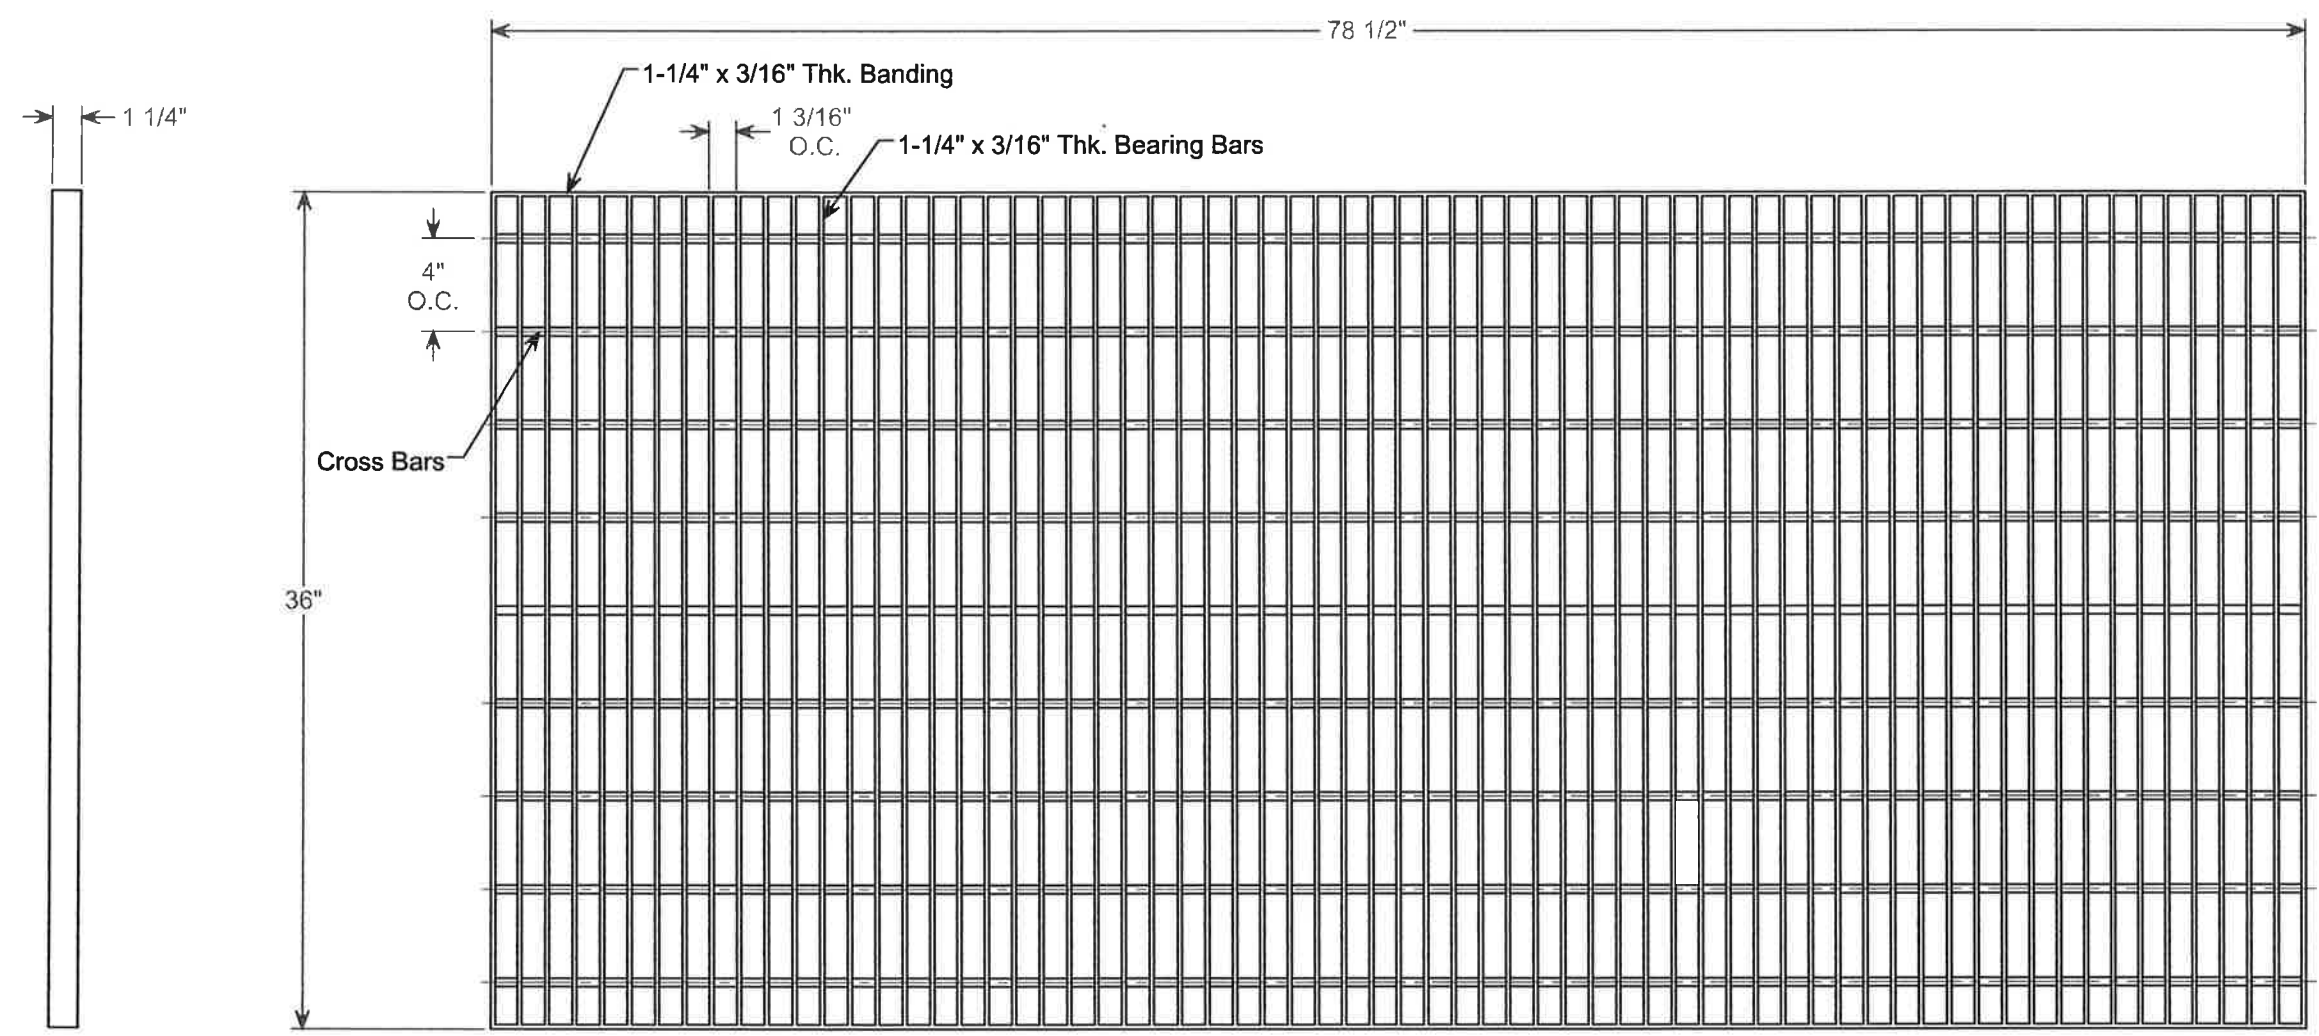

Fabricate according to NAAMM W-19-4

Tolerances, unless noted	
Dimension, (in.)	Tolerance, (in.)
0.00 to 6.00	+/- 1/32"
6.01 to 12.00	+/- 1/16"
12.01 to 24.00	+/- 3/32"
24.01 to 48.00	+/- 1/8"
48.01 to 96.00	+/- 5/32"
96.01 to 144.00	+/- 3/16"
144.01 and up	+/- 1/4"

A	12/14/2017	Initial Drawing	L.G.	-
REV.	DATE	DESCRIPTION	INITIALS	ECN